

SR 21 CJM

The robust 23-meter telescopic work platform has a telescopic boom with a movable cage arm, a maximum cage load of 250 kg and a maximum lateral reach of 16.70 meters.



Electrical-hydraulic proportional control

Robuste und übersichtliche Korbsteuerung.



Ground control system

Extensive and easy-to-use ground control



Movable cage arm


with a cage capacity of up to 270 kg and a large steel

Technical details

Max. Working height	22.70 m
Max. Platform height	20.70 m
Max. Lateral range	16.70 m
Rotation tower angle	360°
Basket size L x W x H	1.80 x 0.75 x 1.11 m
Korblast	250 kg / 2 Personen
Max. Speed	0,5 - 1,8 km/h (0.31 - 1.1 mph)

Min. Transportation dimension L x W x H	10.59 x 2.49 x 2.42 m
Total weight	14,200 kg
Basket rotation angle	+/- 90°
Control System	Electrical-hydraulic proportional control
Antrieb	Yanmar engine (diesel) 4TN98C-1NAS
Fuel tank capacity	130 L


We reserve the right to make technical changes. Illustrations may contain optional extras.

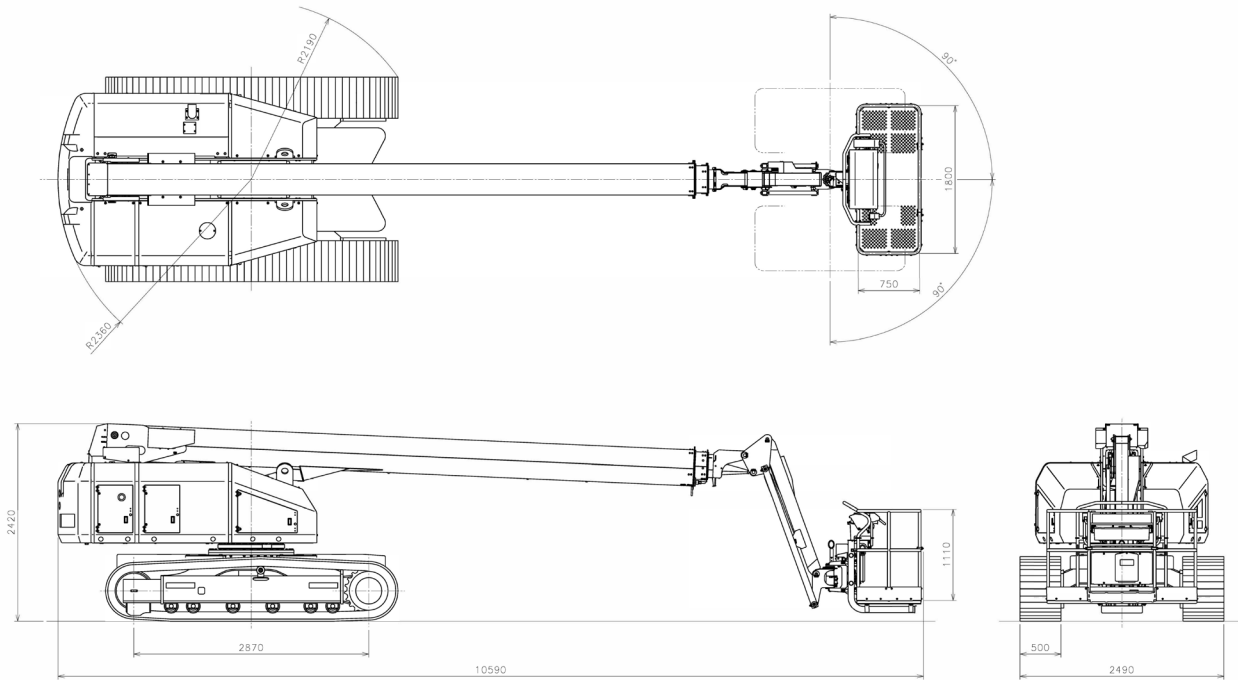

SR 21 CJM

Technische Daten

Max. Working height	22.70 m
Max. Platform height	20.70 m
Max. Lateral Range	16.70 m
Rotation tower angle	360° (endlos)
Basket rotation angle	+/- 90°
Max. Cage capacity	250 kg
Basketsize L x W x H	1.80 x 0.75 x 1.11 m
Min. Transportation dimension L x W x H	10.59 x 2.49 x 2.42 m
Total weight	14,200 kg
Max. Speed	0.5 - 1.8 km/h (0.31 - 1.1 mph)
Control System	Electrical-hydraulic proportional control

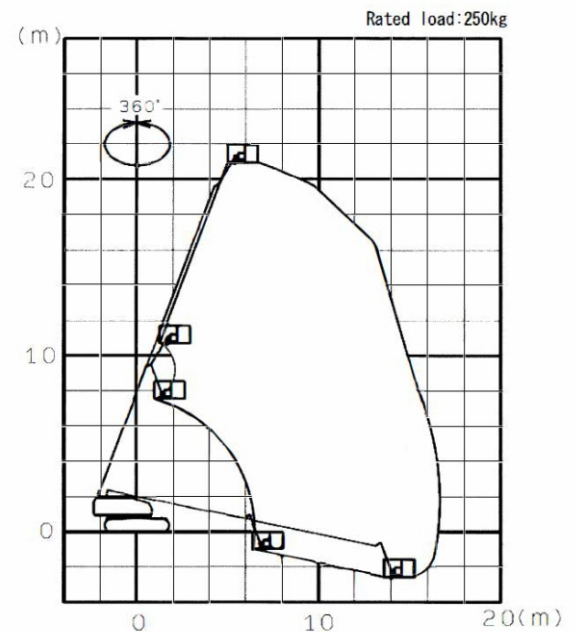

Engine

Engine	Yanmar engine (diesel) 4TN98C-1NAS diesel particulate filter
--------	---

Features

Standard features:

- tracked undercarriage
- rotating basket
- Yanmar 4TN98C-1NAS
- diesel particulate filter

Optional extras:

- Customized RAL painting
- Rubber pads
- Generator

We reserve the right to make technical changes. Illustrations may contain optional extras.